



SWISSCAVE  
KITCHEN

# DATA SHEET SWISSCAVE WIB-45FT

## Technical Data

### Exterior

<b>Casing</b>	Black coated steel
<b>Door glazing</b>	Fully glazed UV-resistant, gas-filled, with low energy panes equipped glass door (double glazed)
<b>Door frame</b>	Filigree edging made of black anodised, brushed aluminium
<b>Door handle</b>	No (touch to open sensor)
<b>Door lock</b>	No
<b>Door hinge</b>	Right
<b>Door hinge convertible as option (right to left)</b>	Yes
<b>Product dimensions without door handle (H/W/D)</b>	447 x 595 x 558 mm
<b>Packaging dimensions (H/W/D)</b>	525 x 655 x 640 mm

### Interior

<b>Temperature zones</b>	1
<b>Lighting</b>	All around illumination white, blue, amber (adjustable)
<b>Lighting on/off switch</b>	Yes
<b>Number of shelves total</b>	3
<b>Number of display shelves</b>	0 (optional available)
<b>Shelf material</b>	Raw natural sapele (Mahogany) wooden display shelves with attractive grip bars
<b>Telescopic shelves on extendable steel ball bearings</b>	Full extension shelves (80%)
<b>Inside casing</b>	Black PUR

### Scope of functions


<b>Optimal usage</b>	Storage and aging of wine
<b>User interface</b>	2 digital displays (set and actual temp.)
<b>Active carbon filters (ensuring optimal air quality)</b>	Yes
<b>Compressor</b>	JP-STD
<b>Coolant</b>	R600a (environment friendly)
<b>Vibrationfree implementation</b>	Yes
<b>Cooling system</b>	Combined fan and convection cooling
<b>Defrost function</b>	Automatic
<b>Temperatur Memory Function (Power failure)</b>	Yes
<b>Condensation water container</b>	Yes
<b>Heating</b>	Powerful winter heating function (*In heating mode, temperature and humidity values may vary from the set value)
<b>Acoustic temperature alarm</b>	Yes
<b>Acoustic door alarm</b>	Yes
<b>Feet adjustable to compensate uneven floors</b>	Yes


### Performance data

<b>Bottle capacity</b>	24
<b>Space for oversized bottles (Magnum, 3lt.)</b>	Yes (if one shelf is removed)
<b>Humidity</b>	Recommendation 50-70%
<b>Actively managed humidity (adjustment range 60-80%)</b>	No
<b>Climate classification</b>	SN-T
<b>Volume</b>	51 l
<b>Noise level</b>	39 dB(A) sound-absorbing recommendation
<b>Temperature range lower zone</b>	5 °C - 20 °C

### General Information

<b>Cooler shape</b>	In-built device
<b>Maintenance contract (warranty extension)</b>	Recommended
<b>Transport weight</b>	36 kg
<b>Net weight</b>	31 kg
<b>Power consumption per day</b>	0.323 kWh (ca.)
<b>Voltage</b>	220 V / 50 Hz
<b>Cable length</b>	2 m

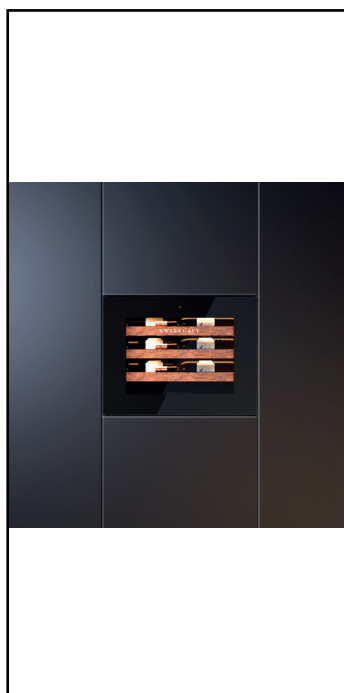



SWISSCAVE AG WIB-45F


A	▶
B	▶
C	▶
D	▶
E	▶
F	▶
G	▶

G


---

118 kWh/annum

---



24



39dB

ABCD

2019/2018